


JUICE UP YOUR APPLE!

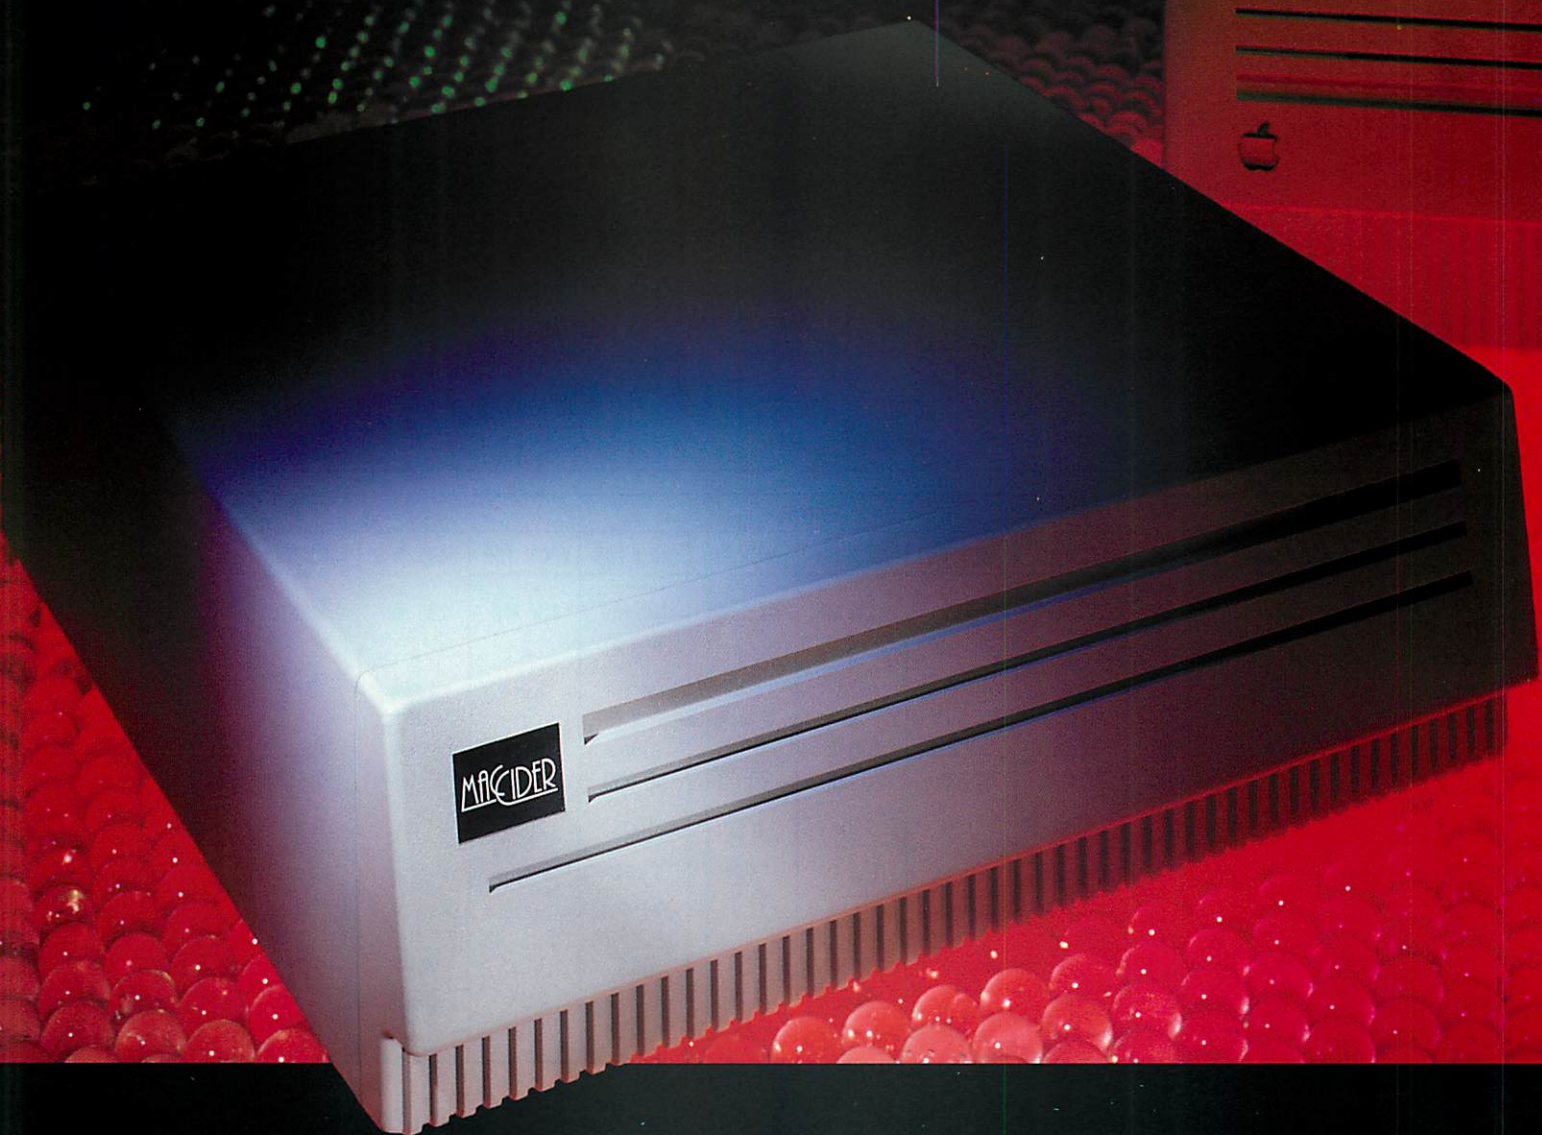

- ☐ Available in 20 to 668 Mb units for MacPlus, SE, II, IIx*, IIcx.
- ☐ Internal and external units pre-formatted at factory.
- ☐ A perfect solution for multi-user, networks or single users.
- ☐ User friendly manual for installation with visual aids.
- ☐ One year limited warranty on defects.
- ☐ All external MacCider drives can be chained together for extended storage solutions.

*Availability applies

APPLE is a registered trademark
MACINTOSH is a trademark of Apple Computer Inc.
MACCIDER is a trademark of BSM Corp.



MC SERIES

PERFORMANCE SPECIFICATIONS

INTERNAL										
	MCI 20	MCI 30	MCI 49	MCI 60	MCI 80	MCI 105	MCI 136	MCI 182	MCI 332	MCI 668
Capacity (Formatted)	21.5 Mb	32 Mb	49 Mb	64.9 Mb	84.9 Mb	105 Mb	136 Mb	182 Mb	332 Mb	668 Mb
Heads	4	4	6	5	7	7	6	8	15	15
Cylinders	407	615	615	921	906	845	1334	1334	1220	1632
Access Time by Track	8	8	8	8	8	4	4	4	4	2
MTBF	MSec	MSec	MSec	MSec	MSec	MSec	MSec	MSec	MSec	MSec
MTBF	70,000	70,000	70,000	70,000	70,000	50,000	50,000	50,000	150,000	150,000
Operating Shock	10gs	10gs	10gs	10gs	10gs	10gs	10gs	10gs	10gs	10gs
Warranty	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year
Compatibility in	MAC SE, II, IIX IICX	MAC SE, II, IIX	MAC SE, II, IIX	MAC SE, II, IIX	MAC SE, II, IIX	MAC II IIX, IICX	MAC II IIX, IICX	MAC II IIX, IICX	MAC II IIX	MAC II IIX
Interface	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI
Power Required	9	9	9	9	9	15	12	12	24	27

EXTERNAL											
	MCX 20	MCX 30	MCX 40	MCX 49	MCX 60	MCX 80	MCX 105	MCX 136	MCX 182	MCX 332	MCX 668
Capacity Formatted	20 Mb	32.2 Mb	40 Mb	49 Mb	64.9 Mb	84.9 Mb	105 Mb	136 Mb	182 Mb	332 Mb	668 Mb
Heads	4	4	4	6	6	6	7	6	8	8	15
Cylinders	615	615	630	615	628	820	845	1334	1334	1334	1632
Access Time by Track	20	8	8	8	8	8	4	4	4	4	2
MTBF	MSec	MSec	MSec	MSec	MSec	MSec	MSec	MSec	MSec	MSec	MSec
MTBF	70,000	70,000	70,000	70,000	70,000	70,00	50,000	50,000	50,000	150,000	150,000
Operating Shock	10gs	10gs	10gs	10gs	10gs	10gs	10gs	10gs	10gs	10gs	10gs
Warranty	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year
Compatibility in	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX	MAC Plus SE, II, IIX IICX
Interface	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI	SCSI
Power Required	16.8	9	13	9	13	13	12	12	12	15	15

With appropriate system configuration.

- ☐ MACCIDER incorporates only the highest quality products in each unit.
- ☐ MACCIDER products are pre-formatted at the factory to ensure quality and performance.
- ☐ MACCIDER Products are available in 20 - 668Mb units both Internal and External
- ☐ 48 hour turnaround on RMA's.
- ☐ State of the art software with a comprehensive visual manual in each system.
- ☐ Compatible with MAC Plus, SE, II, IIX, IICX Systems*
NOTE: MAC Plus needs 1Mb of memory.

FOR FURTHER INFORMATION, PLEASE CONTACT:



1355 GLENVILLE
 RICHARDSON, TX 75081
 PHONE: (214) 699-8300 • 800-888-DISK